

SPORTS LED DISPLAY

SP PLUS SERIES

P6.25|P8.33|P10





SP PLUS SERIES

Sport Stadium Perimeter LED screen Solution

Pixel Pitch

P6.25|P8.33|P10

Contrast Ratio

10000:1

Cabinet size

1600x900x98mm

Viewing angle

140°V/160°H

Refresh Rate

≥3840Hz

Weight

45kg


Bightness

6500cd/m²

Weather Rating

IP65

CABINET SIZE

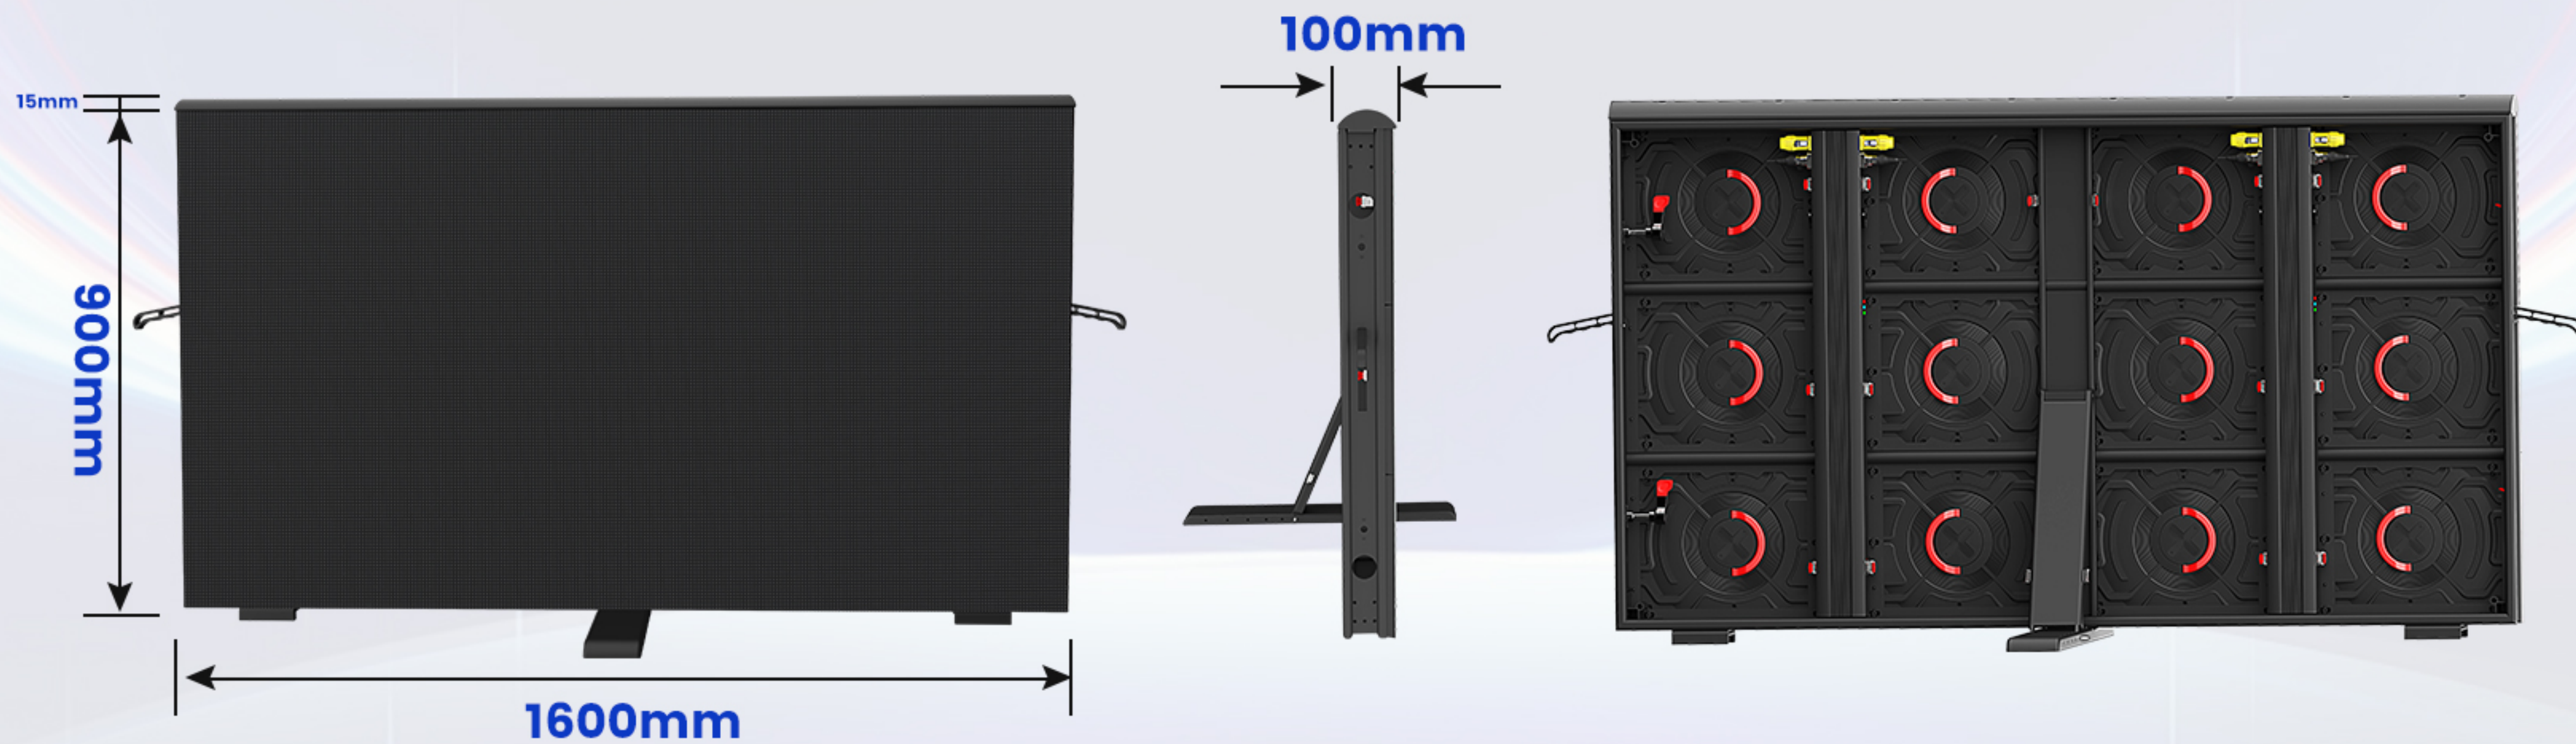


900x1600x98mm

CUSTOMIZED DESIGN IS AVAILABLE




DUAL BACKUP OF POWER SIGNAL

Dual backup design makes operation more reliable

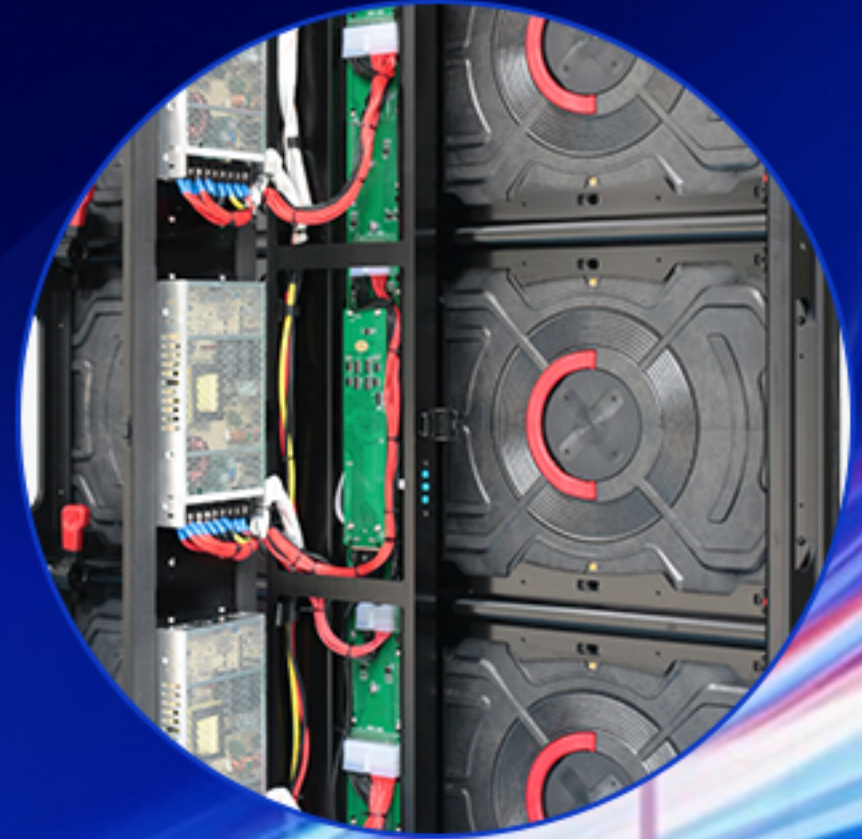

FASTLOCK DESIGN

Fastlock design makes screen installation quickly, it saves much time

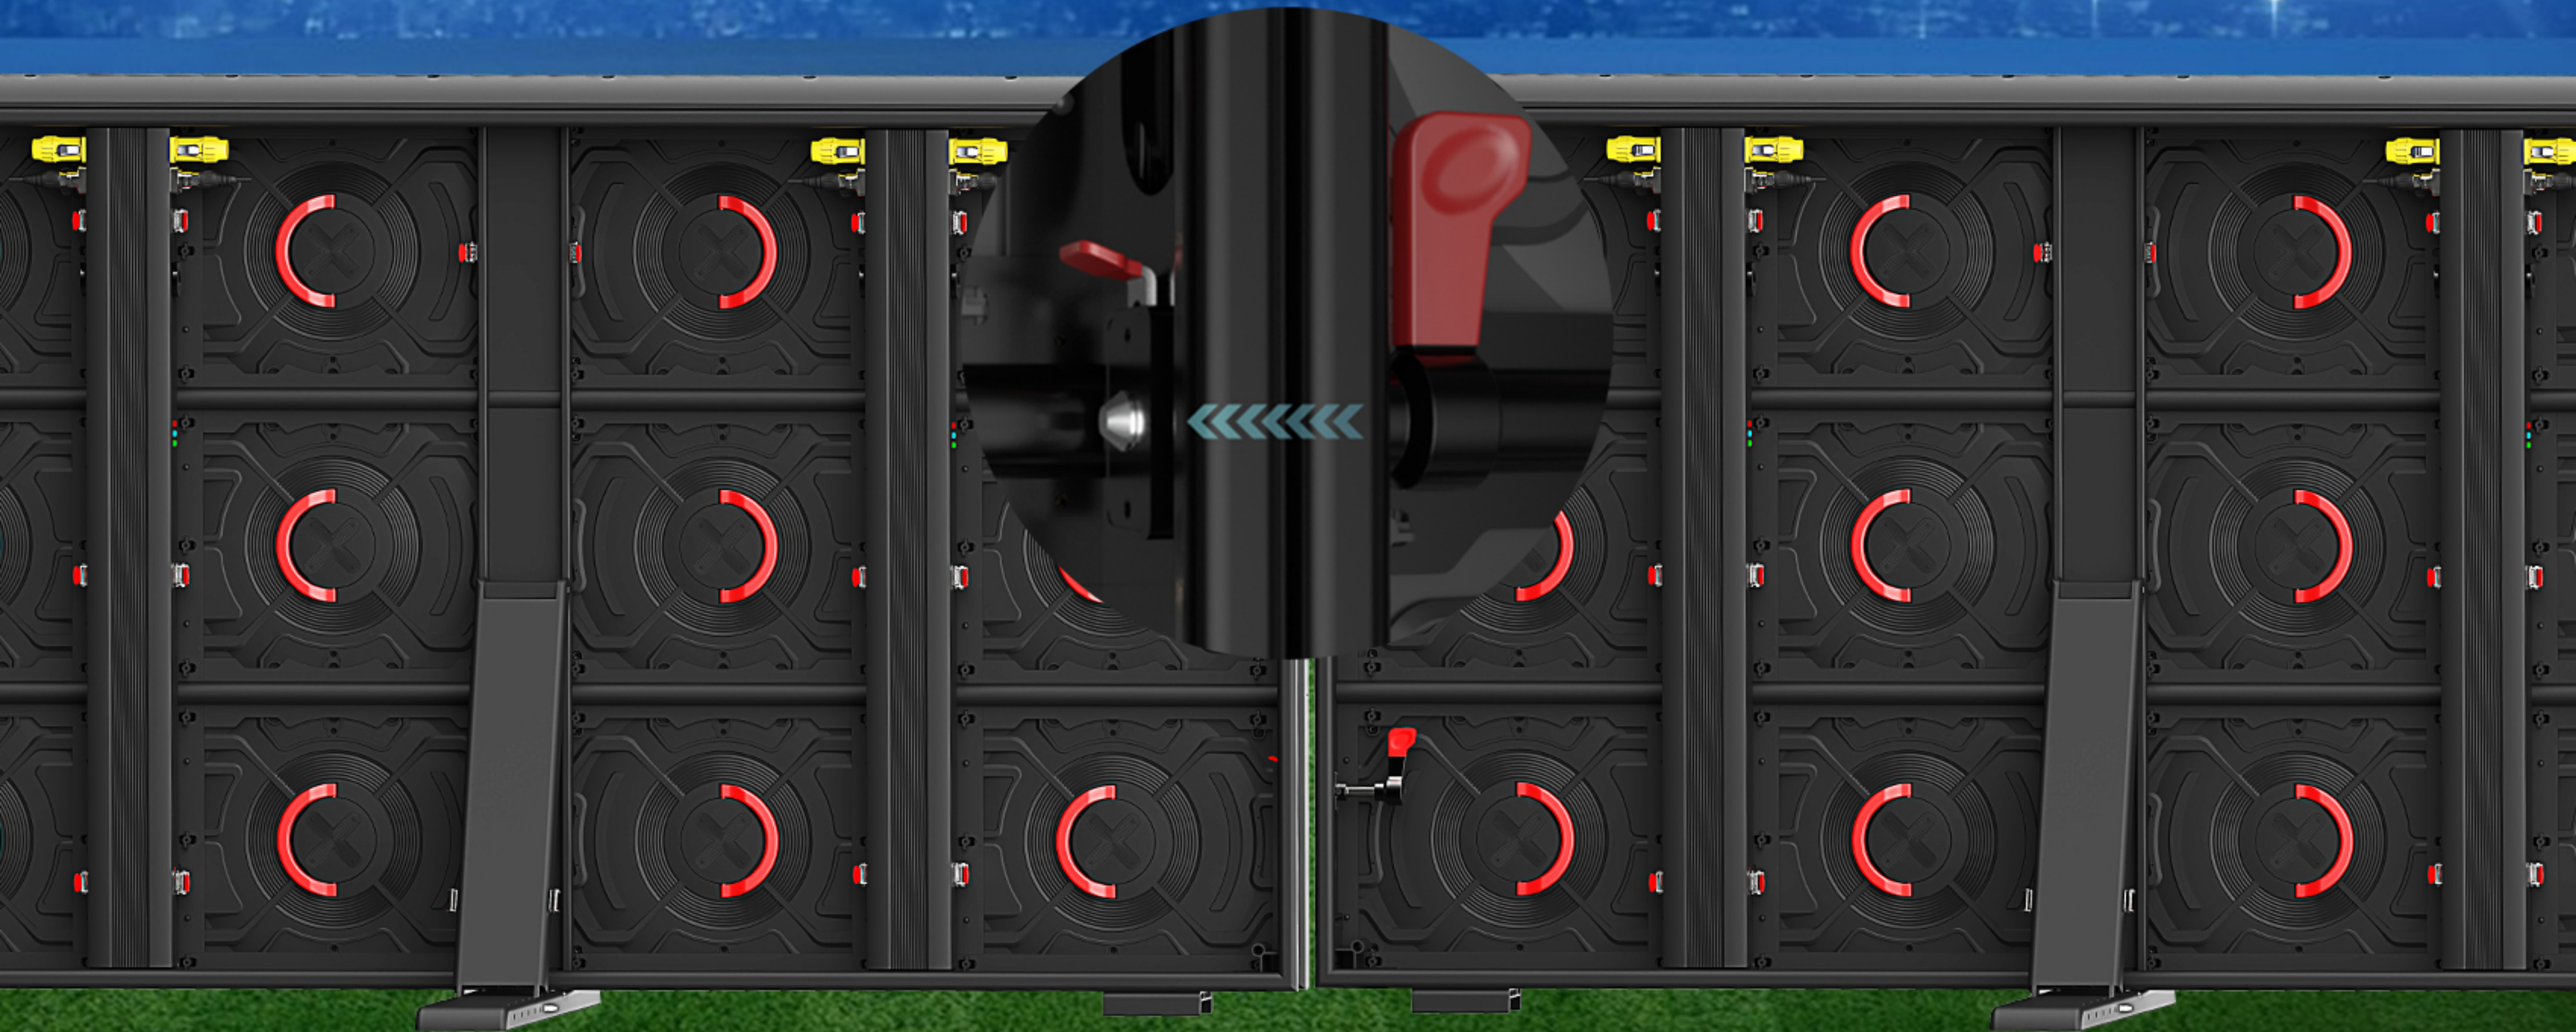

ADJUSTABLE ANGLE

Screen angle can be adjusted in 90°、 95°、 100°、 105°、 110°、 115°



The stand can be folded and hidden



PORTABLE MOBILE

Optional wheels for portable movement and adjustable viewing angle



FRONT&REAR MAINTENANCE

Both front and back maintenance meets different site application



Place the handles to corresponding holes and twist right side to fix it.



Take out the module



Locked



Unlock

HIGH REFRESH RATE

Reduce glint for camera; Achieve the best visual effect by camera shooting.



16 Bit
High grayscale



3840Hz
High refresh



10000:1
High contrast

DDW*display*

Shenzhen DDW Technology Co.,Ltd
LED SCREEN FACTORY



IP65 WATERPROOF

It's for outdoor application with high waterproof level and dust-proof level.
It can resist some bad weather during outdoor events.



160° SUPER WIDE VIEWING ANGLE

Create a thrilling experience like being on the field



160°

HIGH BRIGHTNESS

Display performance is still vivid under strong sunlight



$\geq 6500\text{cd/m}^2$ high brightness

APPLICATIONS



PACKAGING




HIGHLY PROTECTED

Super strong protection to prevent damage to LED beads




Soft Rubber

Rubber and soft mask can protect the athletes from being hurt

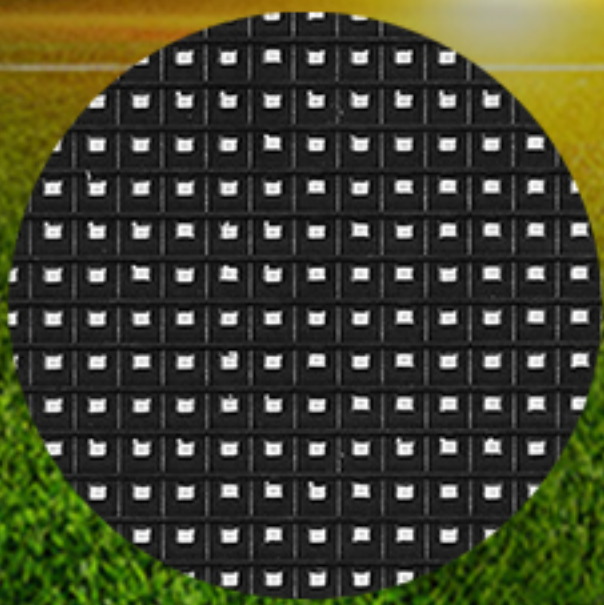

Soft mask

Matte corrugation module mask achieves ultra-high contrast ratio

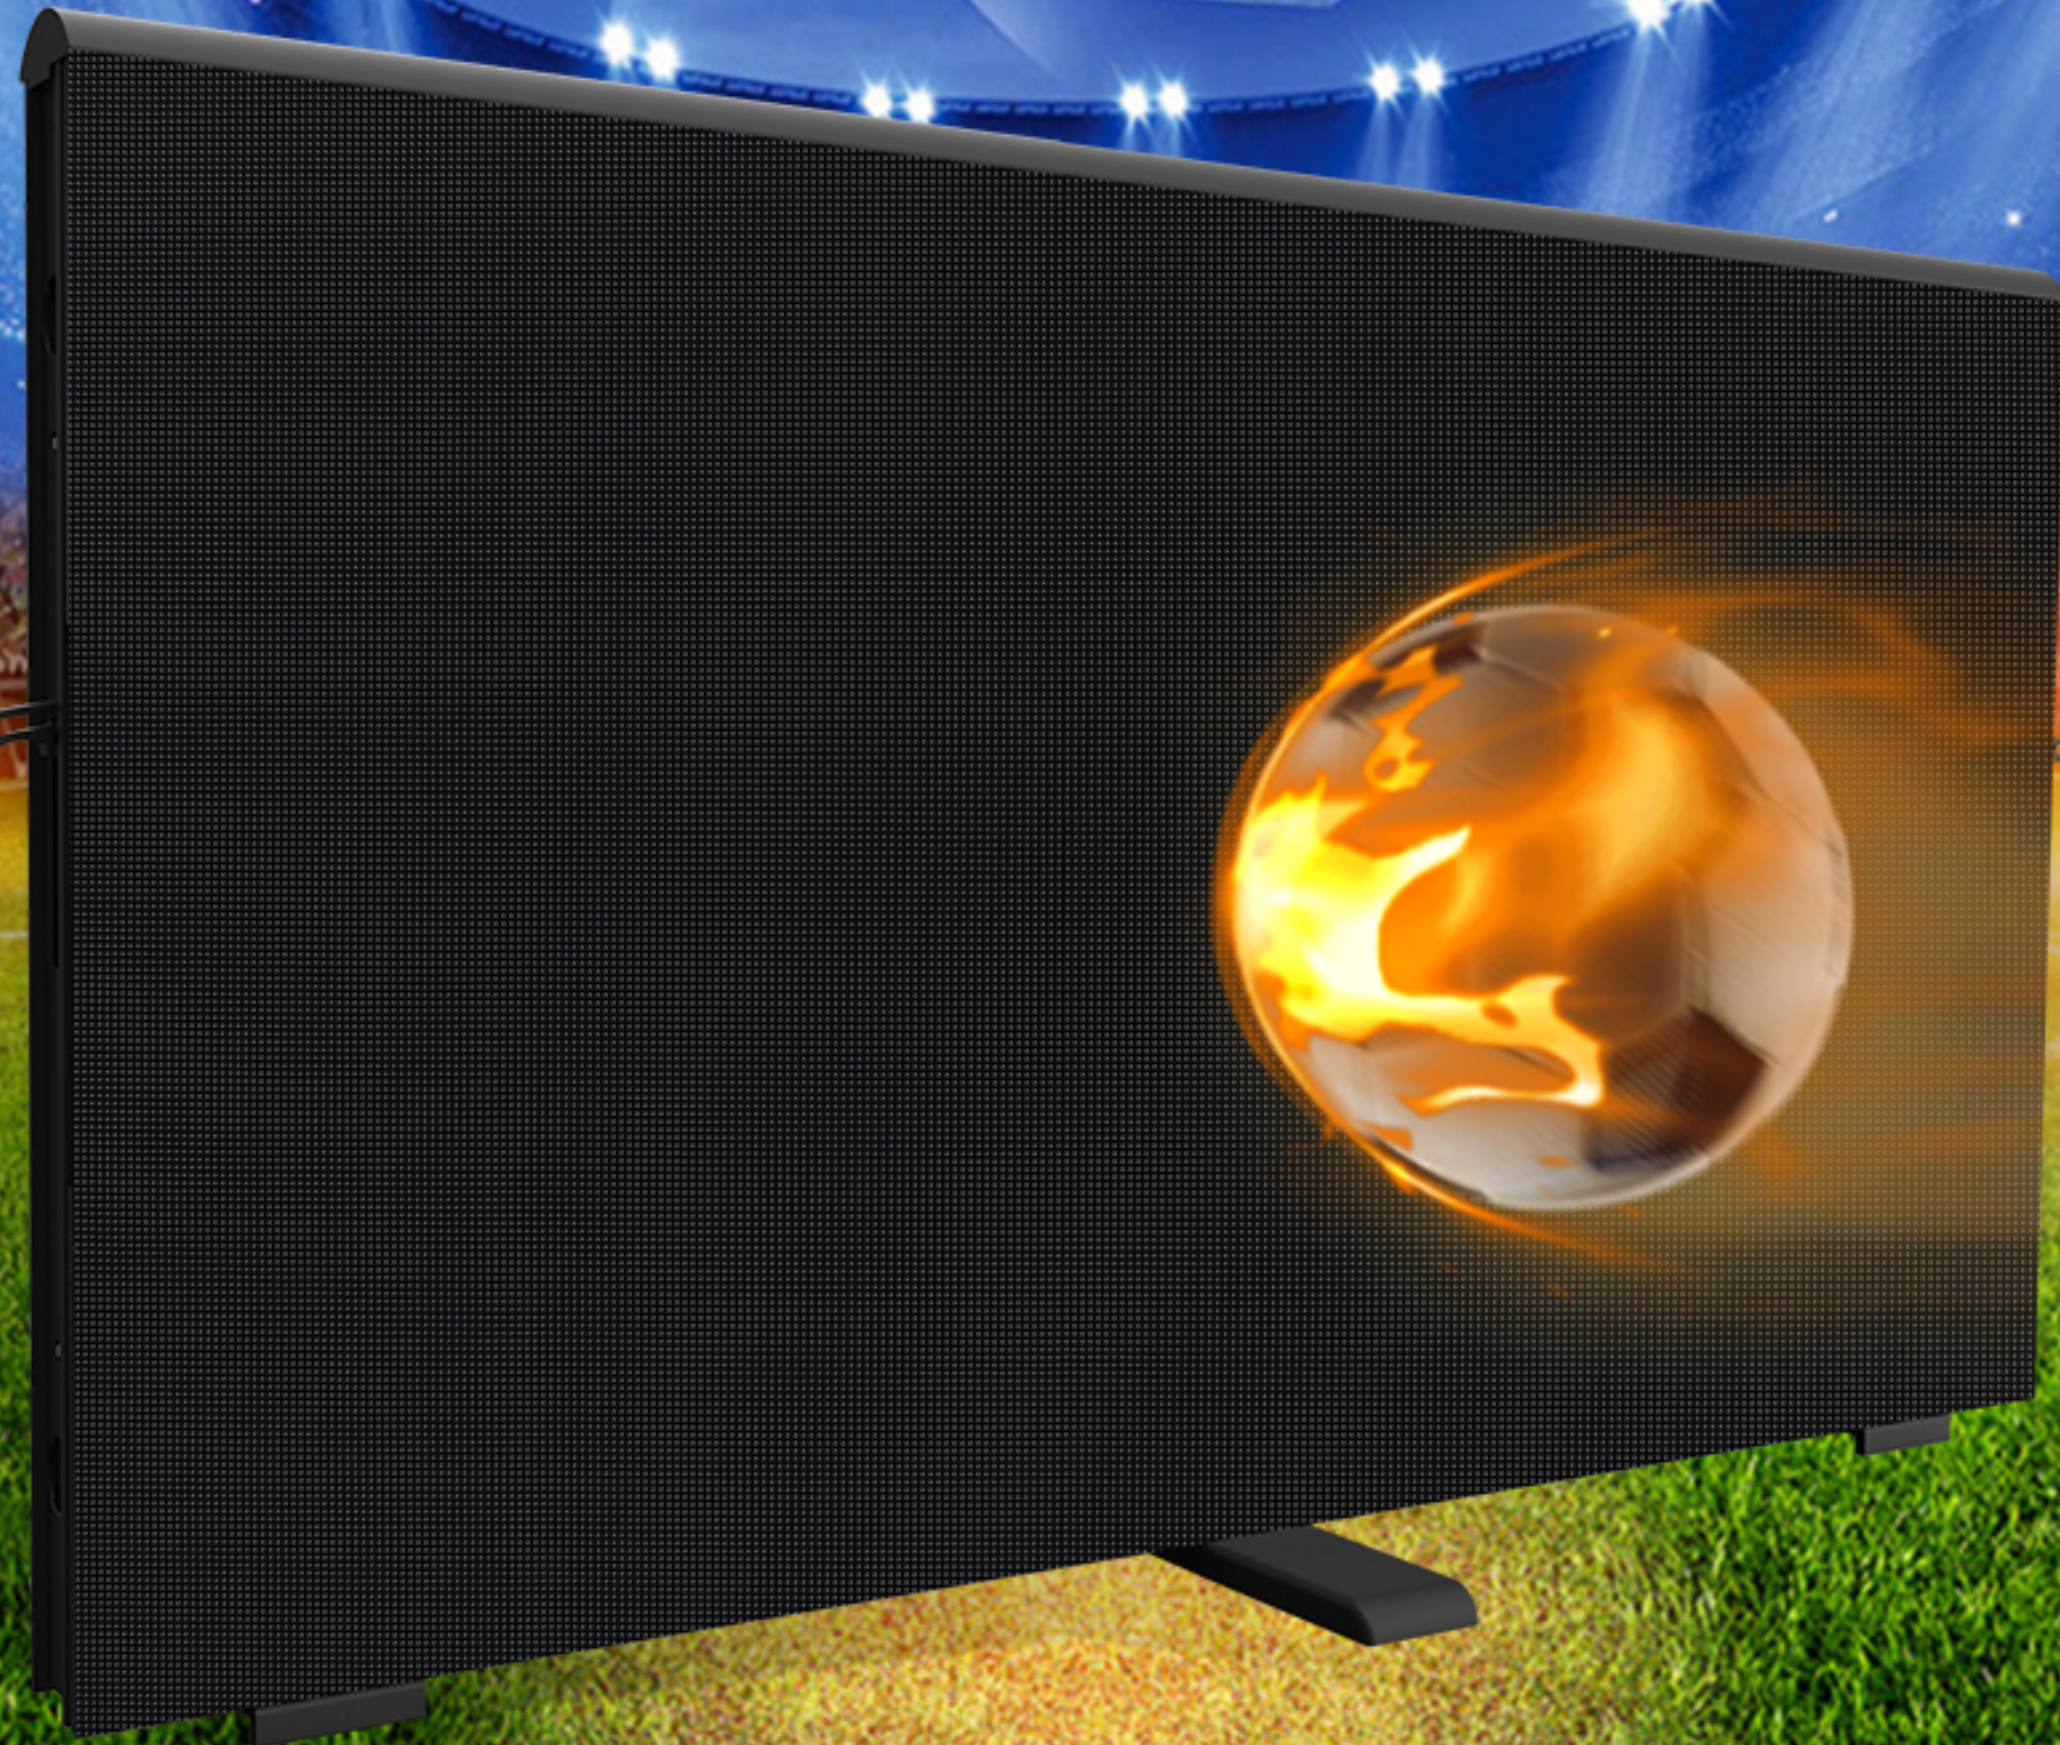

ACCESSORIES



Network cable



Power cord



Screw



Pre maintenance Wrench



Power



Movable wheels



Soft Rubber



Receiving card



Folding stand



Mask



LED module



Video Processor

SPECIFICATIONS

Item Number	P6.25	P8.33	P10
SMD type	SMD2727	SMD2727	SMD2727
Physical density (dots/sqm)	25600	14400	10000
Module resolution	64*48	48*36	40*30
Module dimension	400*300	400*300	400*300
Module quantity (W*H)	4*3	4*3	4*3
Panel resolution (W*H)	128*144	96*108	80*90
Panel size (mm)	1600*900*98	1600*900*98	1600*900*98
Flatness (mm)	≤0.1	≤0.1	≤0.1
Maintenance mode	Front & Rear	Front & Rear	Front & Rear
Brightness (nits)	6500	6500	6500
Color temperature (K)	3200-9300 optional	3200-9300 optional	3200-9300 optional
Cabinet weight	45	45	45
Viewing angle (V/H)	140°/160°	140°/160°	140°/160°
Contrast ratio	10000 : 1	10000 : 1	10000 : 1
Frame-changing frequently	50/60	50/60	50/60
Drive mode	Static 1/6 scale	Static 1/3 scale	Static 1/2 scale
Refresh rate	3840	3840	3840
Gray scale	16bit	16bit	16bit
Max power consumption (w/m²)	700-800	700-800	700-800
Avg. power consumption (w/m²)	200-300	200-300	200-300
protection grade	IP65	IP65	IP65
Electric power requirements	AC90-264V,47-63Hz		
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%		
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%		
Cert	CCC/CE/RoHS/FCC/CB/TUV/IEC		

3~5 YEARS WARRANTY

Common warranty in LED field is 2 years, ours is 5
Longer warranty periods, better after-sale services
worry-free user experience



OEM&ODM

1000+
Projects

5 days
Fast delivery



Door to door

3D



Installation video



Sample support



CERTIFICATE

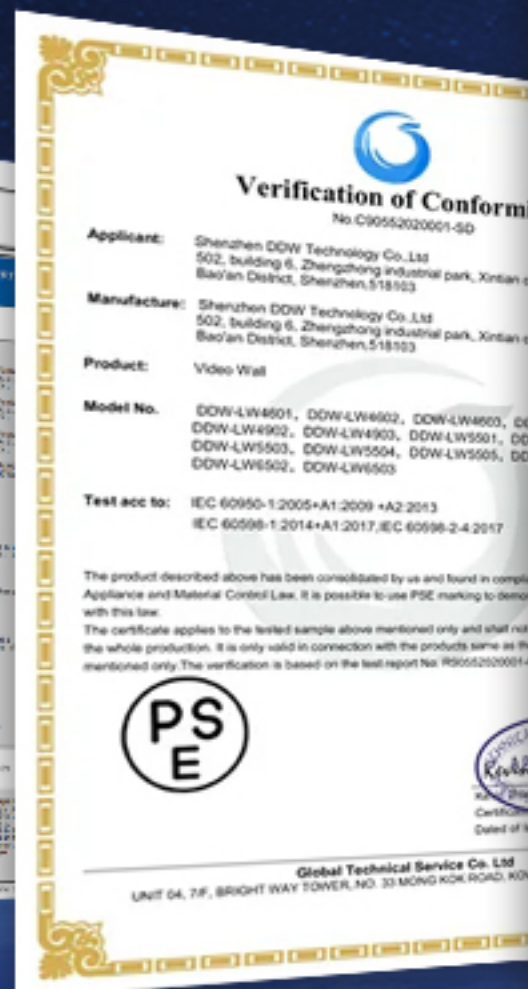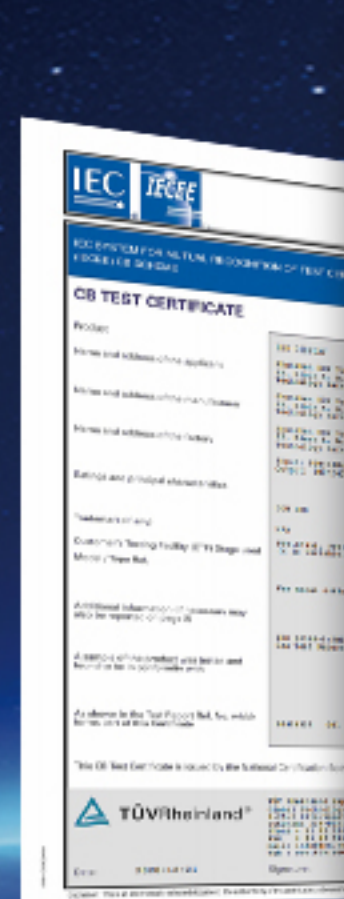

CONTACT US

SHENZHEN DDW TECHNOLOGY CO.,LTD



0086-755-23229716




0086-134-17558100



www.ddw.net



info@ddw.net



2F Building 8, YiLisheng Industry Park, Fuyong
Baoan District, Shenzhen, 518103